



XP series

XP-40 / XP-60 / XP-80


- Oxygen supply for fish breeding
- Septic tank
(Biological contact aeration)
- Air injection for bubble bath
- Small capacity compressor

Specifications

		XP-40		XP-60		XP-80	
Rated Voltage	V	AC220 - 240					
Power Supply Frequency	Hz	50	60	50	60	50	60
Rated Loading Pressure	kPa	12.8		14.7			
Airflow Volume	ℓ/min	40		60		80	
Power Consumption	W	30		39		58	
Noise Level	dBA	33		35		36	
Weight	kg	4.1		4.3			

* Above data is reference for catalogue



Performance Curves

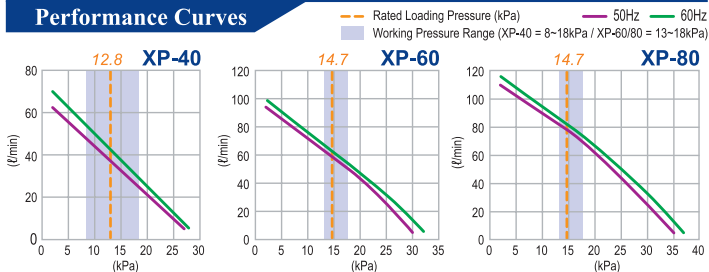

* Above graphs are reference for catalogue

Dimensions

(UNIT : mm)



* Materials may be modified without notice.

* "HIBLOW" is a registered mark of Techno Takatsuki co., Ltd.